

## HRFG-E 系列LED油站灯

### HRFG-E Series LED Gas Station Lamp



Waterproof



Dustproof



Corrosionproof

GB

EN

EAC


### 型号规格含义 Nomenclature



### 订货须知 Ordering Information

- ◆ 注明执行标准、工作电压、环境温度；
- ◆ 按照产品型号规格说明逐条选择，例如：需要LED油站灯100W，则产品选型为HRFG-E100；
- ◆ 本灯具出厂时光源已配。
- ◆ Specify the executive standard, working voltage, and environment temperature.
- ◆ Follow the product nomenclature for selection. For example, if 100W LED gas station lamp are needed, HRFG-E100 is selected as the product type.
- ◆ The light fittings are supplied with light source when delivery.

### 配光曲线 Light Distribution Curve

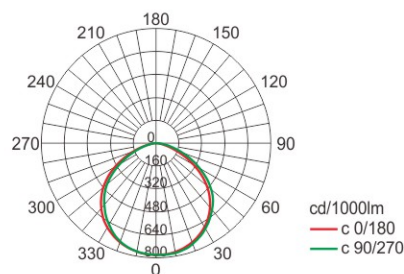

## 产品规格 Product Specifications

型号规格 Model specifications	灯具功率 Lamp power	光通量 Luminous flux	光效 luminous efficiency	色温 Color temperature	显色指数 CRI	重量 Weight
HRFG-E100	100W	≥14000lm	140±10lm/W	5700K	Ra≥80	4.8kg
HRFG-E150	150W	≥21000lm				

## 产品描述 Product Description

执行标准 Conformity to standards	中国GB标准 Chinese GB standards	欧盟EN标准 European EN standards
额定电压 Rated voltage	100V~240V AC 50/60Hz	100V~277V AC 50/60Hz
外壳材质 Enclosure material	高纯铝壳体 High purity aluminum enclosure	
透明罩材质 Transparent cover material	钢化玻璃 Tempered glass	
环境温度 Ambient temperature	-40°C ~ +55°C (-60°C ~ +60°C 可选 Optional)	
防护等级 Degree of protection	IP66	
防腐等级 Corrosion-proof level	WF1、WF2(可选 Optional)	C3、C4(可选 Optional)

## 外形尺寸 Outline dimension

