


## FGY-M 系列面板灯(LED)

### FGY-M Series Panel Lights (LED)



Waterproof

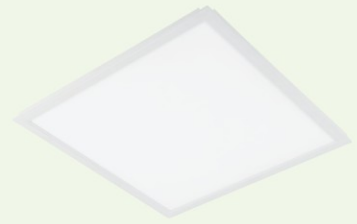

Dustproof



Corrosionproof

GB

EN

EAC

### 型号规格含义 Nomenclature




注：正白5000K为标准配置，可不注。  
Note: White 5000K is standard configuration, which can be omitted.

### 订货须知 Ordering Information

- ◆ 注明执行标准、工作电压、环境温度、色温、安装方式；
- ◆ 按照产品型号说明逐条选择，例如：FGY-M36 CW K表示为LED 36W面板灯色温6000K，卡簧式安装；
- ◆ 有特殊要求请说明；
- ◆ 可根据用户要求配置调光型灯具。
- ◆ Specify the executive standard, working voltage, environment temperature, color temperature and mounting.
- ◆ Follow the product nomenclature for selection.  
For example: FGY-M36 CW K means LED 36w panel light with color temperature of 6000K, circlip type installation;
- ◆ Please indicate any special requirements.
- ◆ The dimming lamps can be equipped according to user's requirements.



## 配光曲线 Light Distribution Curve

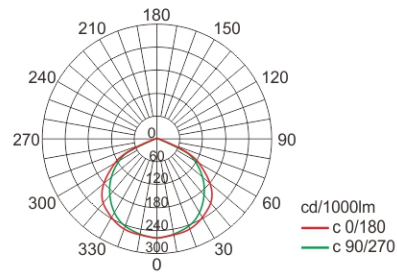

## 产品规格 Product Specifications


型号规格 Model specifications	灯具功率 Lamp power	光效 luminous efficiency	色温 Color temperature	显色指数 CRI	壳体类型 Enclosure type	重量 Weight
FGY-M12□□	12W	100±10lm/W	3000K 4000K 5000K 6000K	Ra≥80	I	1.5kg
FGY-M36□□	36W				II	3.2kg
FGY-M45□□	45W				III	5.7kg
FGY-M72□□	72W					

## 产品描述 Product Description

执行标准 Conformity to standards	中国GB标准 Chinese GB standards	欧盟EN标准 European EN standards
额定电压 Rated voltage	220V~240V AC 50/60Hz	220V~240V AC 50/60Hz 100V~277V AC 50/60Hz (可选 Optional)
外壳材质 Enclosure material	优质钢板 High quality steel plate	
透明罩材质 Transparent cover material	PS透明板 PS transparent panel	
环境温度 Ambient temperature	-25°C ~ +55°C	
防护等级 Degree of protection	IP30/IP40/IP42/IP65(可选 Optional)	



## 外形尺寸 Outline dimension

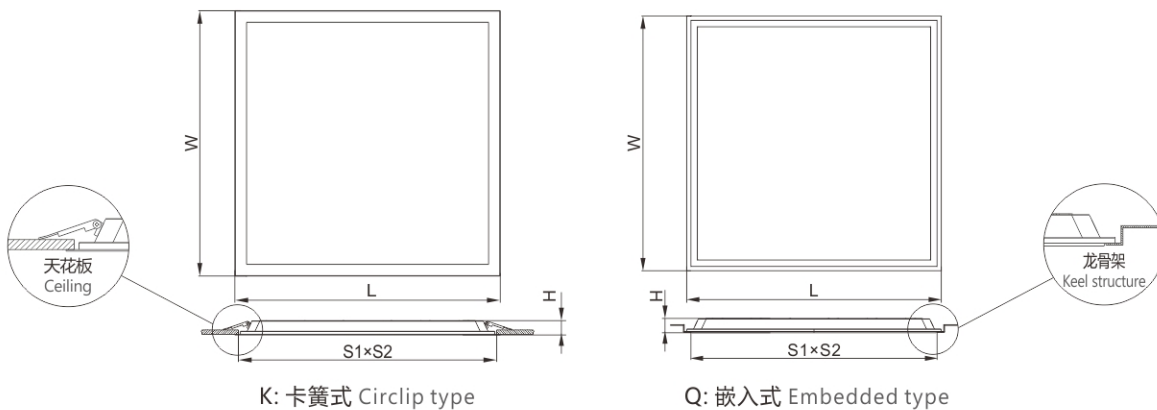

壳体类型 Enclosure type	L	W	H	S1	S2
I 型 Type I	300	300	32	275	275
II 型 Type II	595	595	32	575	575
III 型 Type III	595	1195	32	575	1175