


## HRFY-E 系列防水防尘防腐LED线性灯(C型)

HRFY-E Series Weatherproof Linear Light Fittings with LED (Type C)



EN EAC

### 型号规格含义 Nomenclature

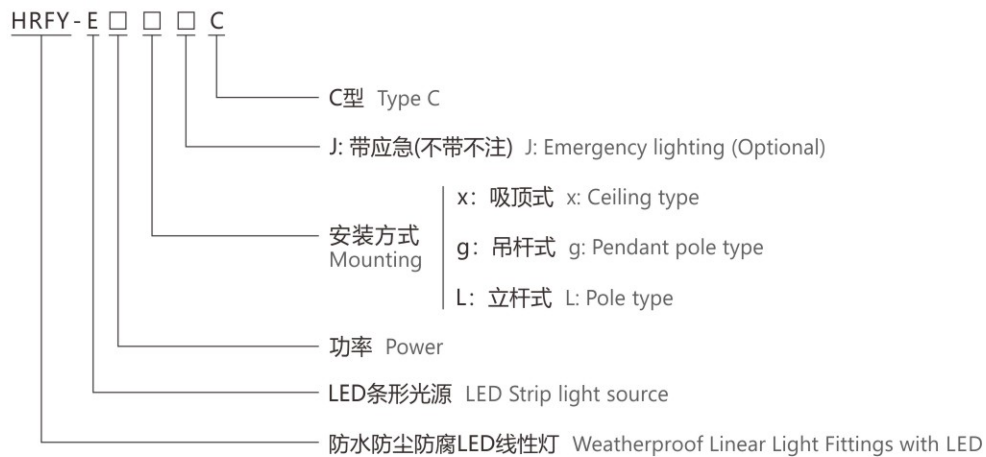


### 订货须知 Ordering Information

- ◆ 注明执行标准、工作电压、环境温度;
- ◆ 按照产品型号规格说明逐条选择,
  - 例如: 需要铝合金外壳, 线性LED灯36W, 吸顶式安装, 则产品选型为HRFY-E36 x C;
- ◆ 本灯具出厂时已配光源。
- ◆ Specify the executive standard, working voltage, environment temperature.
- ◆ Follow the product nomenclature for selection, For example:
  - For an aluminum alloy enclosure, 36W linear LED lights, and ceiling type installation, the product model is HRFY-E36 x C.
- ◆ Light fittings are supplied with light source.

## HRFY-E 系列防水防尘防腐LED线性灯(C型)

### HRFY-E Series Weatherproof Linear Light Fittings with LED (Type C)

#### 配光曲线 Light Distribution Curve

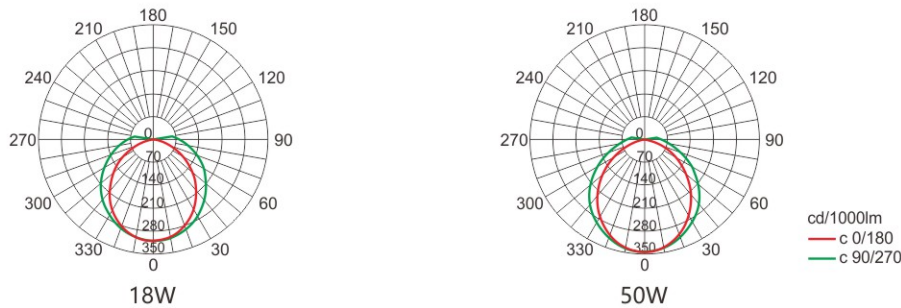

#### 产品规格 Product Specifications

型号规格 Model specifications	灯具功率 Lamp power	光通量 Luminous flux	光效 luminous efficiency	色温 Color temperature	显色指数 CRI	壳体类型 Enclosure type	重量 Weight
HRFY-E18□□C	18W	≥2520lm	150±10lm/W	5000K	Ra≥80	I	2.6kg
HRFY-E36□□C	36W	≥5040lm					2.7kg
HRFY-E36□□C	36W	≥5040lm				II	4.1kg
HRFY-E50□□C	50W	≥7000lm					4.2kg

#### 带应急功能参数 Parameters for emergency feature

型号规格 Model Specifications	正常功率 Normal power	应急功率 Emergency power	应急时间 Emergency time	壳体类型 Enclosure type	重量 Weight
HRFY-E18□JC	18W	10W	90 min (180min可选) (180min Optional)	I	2.8kg
HRFY-E36□JC	36W			II	4.4kg






#### 产品描述 Product Description

执行标准 Conformity to standards	欧盟EN标准 / 北美标准 European EN standards / American standards
额定电压 Rated voltage	220V~240V AC 50/60Hz      100V~277V AC 50/60Hz (可选 Optional)
外壳材质 Enclosure material	铝合金 Aluminum alloy
透明罩材质 Transparent cover material	PC透明罩 PC transparent cover
环境温度 Ambient temperature	-40°C~+55°C (-60°C~+60°C 可选 Optional)
防护等级 Degree of protection	IP66
防腐等级 Corrosion-proof level	C4
引入装置 Cable gland	2×M20×1.5引入规格, 适合Φ6mm~Φ10mm电缆 2×M20×1.5 entry specification, suitable for cable of Φ6mm~Φ10mm
接线端子 Terminal	≤2.5mm <sup>2</sup> 导线可靠连接(≤4mm <sup>2</sup> 可选) ≤2.5mm <sup>2</sup> reliable wire connection (≤4mm <sup>2</sup> is optional)



## HRFY-E 系列防水防尘防腐LED线性灯(C型) HRFY-E Series Weatherproof Linear Light Fittings with LED (Type C)

### 外形及安装尺寸举例 Example of Outline Dimension and Mounting Type

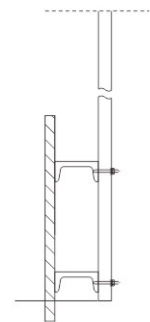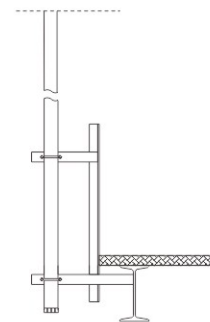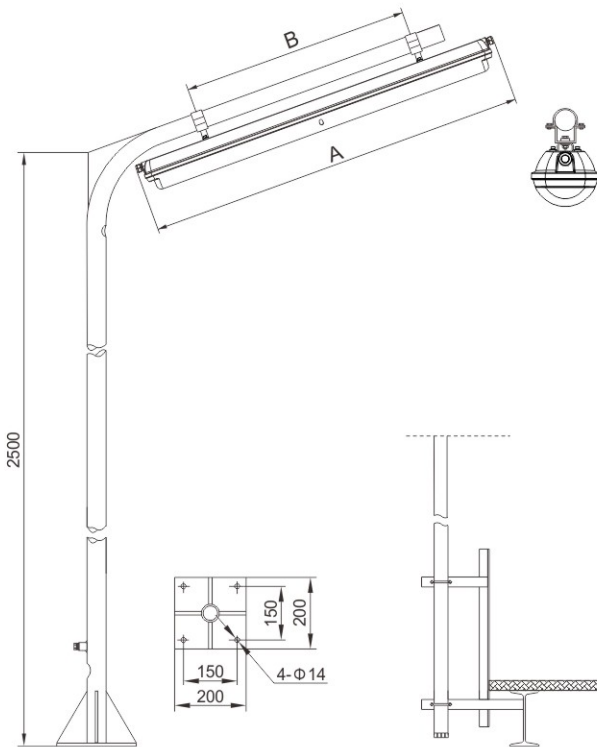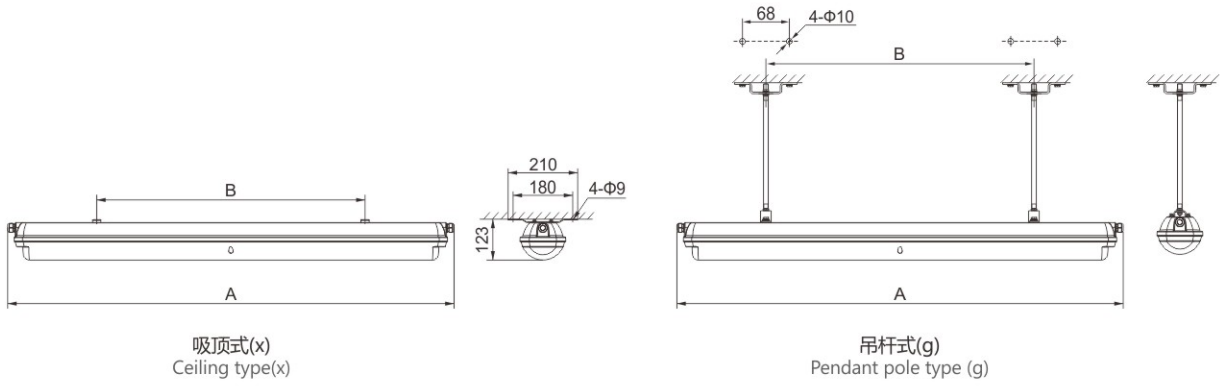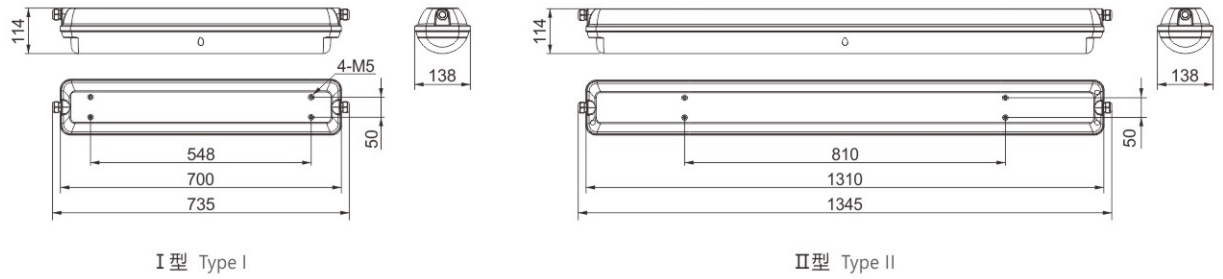

壳体类型 Enclosure type	A	B
I 型 Type I	735	548
II 型 Type II	1345	810

立杆式(L)  
Pole type(L)

