

HRFY 系列防水防尘防腐全塑荧光灯(B型)

HRFY Series Weatherproof Light Fittings for Fluorescent Lamps (Type B)



EN EAC



Waterproof




Dustproof



Corrosionproof

型号规格含义 Nomenclature

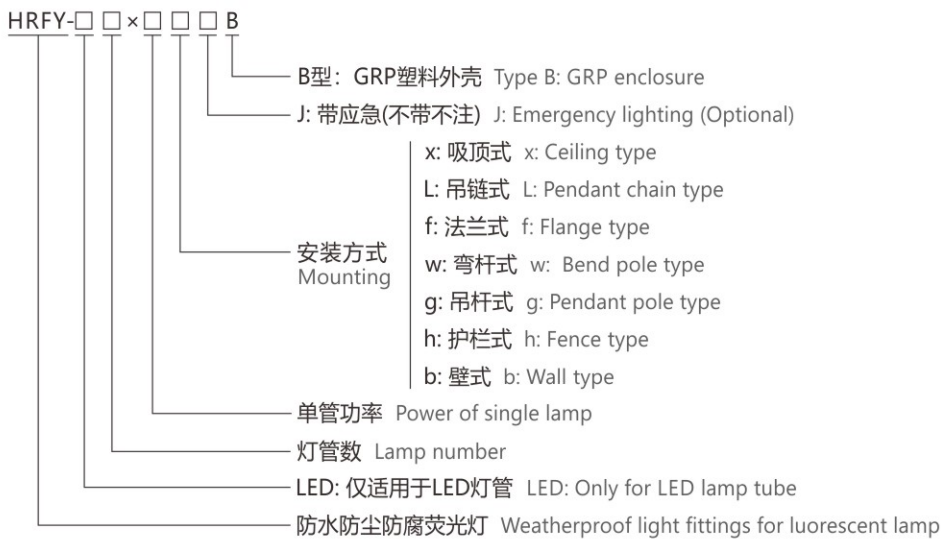

订货须知 Ordering Information

- ◆ 注明执行标准、工作电压、环境温度;
- ◆ 按照产品型号规格说明逐条选择, 例如: 需要GRP外壳材质, 双管36W吸顶式安装, 则产品选型为HRFY-2×36 xB;
- ◆ 供货LED灯具时, 出厂配置LED光源; 其他灯具出厂时不配光源, 由用户自配, 建议配置飞利浦、欧司朗品牌;
- ◆ 如需加装应急装置请注明(应急时只有单只灯管工作);
- ◆ 常规配置为电缆布线, 如需钢管布线请注明。
- ◆ Specify the executive standard, working voltage, environment temperature.
- ◆ Follow the product nomenclature for selection. For example: if you need GRP material for the enclosure and ceiling mount double 36w tube, then you may choose the product HRFY-2×36 xB;
- ◆ LED light fittings are supplied with LED lamp. Other light fittings are supplied without light source. Philips, Osram Brand is recommended.
- ◆ Please specify if an emergency device is required (only one tube operates during an emergency);
- ◆ Generally, cable wiring is provided, please specify if steel pipe wiring is needed.

HRFY 系列防水防尘防腐全塑荧光灯(B型)

HRFY Series Weatherproof Light Fittings for Fluorescent Lamps (Type B)

产品规格 Product Specifications

型号规格 Model Specifications	光源类型 Light source	灯具功率 Lamp power	光通量 Luminous flux		壳体类型 Enclosure type	重量 Weight
			灯管 Lamp tube	灯具 Luminaire		
HRFY-2×18□B	T8	2×18W	2600lm	≥2200lm	I	3.3kg
HRFY-2×36□B		2×36W	6500lm	≥5500lm	II	5.2kg
HRFY-LED 2×9□B	LED	2×9W	2160lm	≥1700lm	I	3.1kg
HRFY-LED 2×14□B		2×14W	4200lm	≥3700lm		3.1kg
HRFY-LED 1×18□B		1×18W	2160lm	≥1800lm	II	4.2kg
HRFY-LED 2×18□B		2×18W	4320lm	≥3700lm		4.9kg
HRFY-LED 1×28□B		1×28W	3360lm	≥3000lm		4.5kg
HRFY-LED 2×28□B		2×28W	6720lm	≥6100lm		5.5kg

带应急功能参数 Parameters for emergency feature

型号规格 Model Specifications	光源类型 Light source	应急时间 Emergency time	壳体类型 Enclosure type
HRFY-2×18□JB	T8荧光灯 T8 Fluorescent lamp	120 min (180min 可选 Optional)	I
HRFY-2×36□JB			II
HRFY-LED 2×9□JB	LED	120 min (180min 可选 Optional)	I
HRFY-LED 2×18□JB			II
HRFY-LED 2×28□JB			


产品描述 Product Description

执行标准 Conformity to standards	欧盟EN标准 European EN standards
额定电压 Rated voltage	100V~277V AC 50/60Hz
外壳材质 Enclosure material	GRP
透明罩材质 Transparent cover material	PC透明罩 PC transparent cover
环境温度 Ambient temperature	-40℃ ~ +55℃ (-60℃ ~ +60℃ 可选 Optional)
防护等级 Degree of protection	IP66
防腐等级 Corrosion-proof level	C4
引入装置 Cable gland	1×M25×1.5格兰+1×M25×1.5堵头, 适合Φ10mm~Φ16mm电缆 1×M25×1.5 gland + 1×M25×1.5 plug, suitable for cable of Φ10mm~Φ16mm
接线端子 Terminal	≤2.5mm ² 导线可靠连接(≤4mm ² 可选) ≤2.5mm ² reliable wire connection (≤4mm ² is optional)






HRFY 系列防水防尘防腐全塑荧光灯(B型) HRFY Series Weatherproof Light Fittings for Fluorescent Lamps (Type B)

配光曲线 Light Distribution Curve

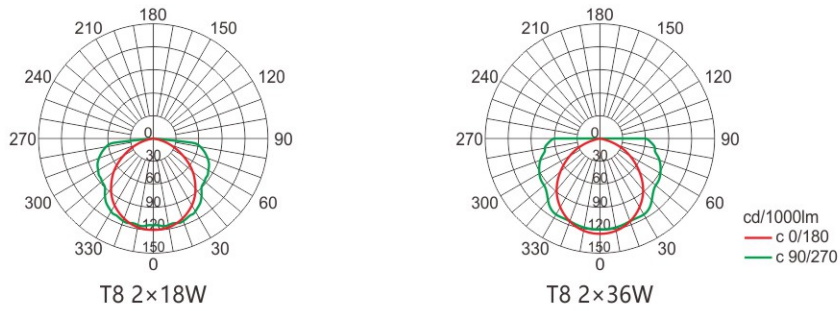

外形及安装尺寸举例 Example of Outline Dimension and Mounting Type

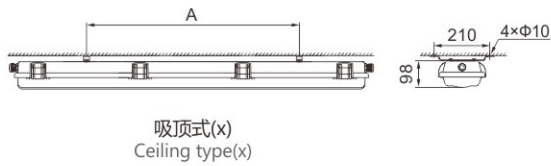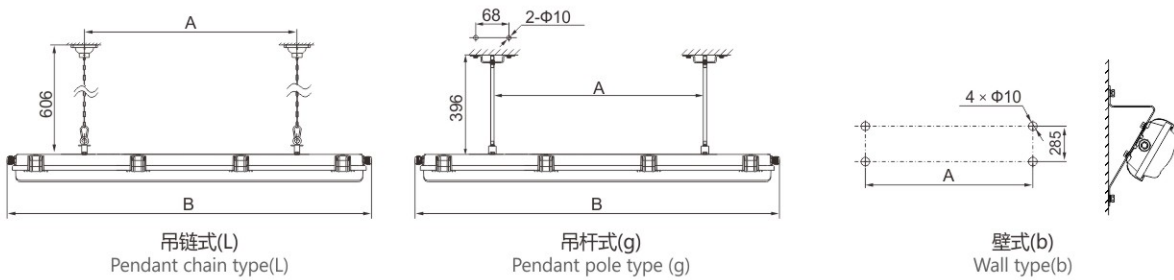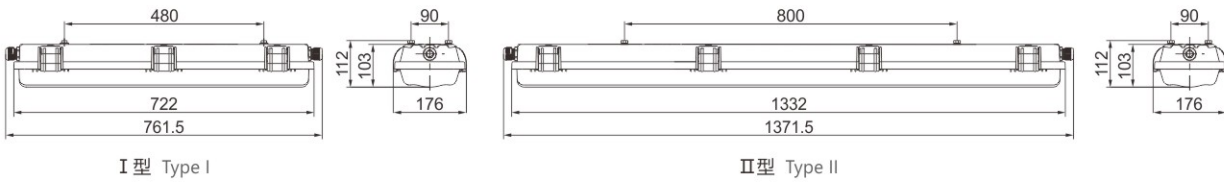

壳体类型 Enclosure type	A	B
I 型 Type I	480	761.5
II 型 Type II	800	1371.5

