

## FAT-L 系列防水防尘防腐泛光灯(A型)

### FAT-L Series Weatherproof Floodlights (Type A)



Waterproof



Dustproof



Corrosionproof

GB EN EAC

### 型号规格含义 Nomenclature




### 订货须知 Ordering Information

- ◆ 注明执行标准、工作电压、环境温度；
- ◆ 按照产品型号规格说明逐条选择，  
例如：需Ⅱ型壳体，金卤灯250W泛光灯，则产品选型为 FAT-L-L250 A ；
- ◆ ≤400W灯具出厂时不配光源，由用户自配，建议配置飞利浦欧司朗、亚明品牌；  
金卤灯250W、400W需配置欧标光源；
- ◆ 1000W灯具出厂时光源、镇流器已配。
- ◆ Specify the executive standard, working voltage, and environment temperature.
- ◆ Follow the product nomenclature for selection. For example: type II enclosure floodlight, 250W metal halide lamp, the product type shall be FAT-L-L250A.
- ◆ The light source shall not be supplied for light fitting of 400W and less. Philips, Osram and Yaming Brands are recommended. European standard light source should be provided for 250W and 400W metal halide lamp.
- ◆ Light sources and ballasts are already provided for 1000W light fittings.

## FAT-L 系列防水防尘防腐泛光灯(A型)

### FAT-L Series Weatherproof Floodlights (Type A)

#### 配光曲线 Light Distribution Curve

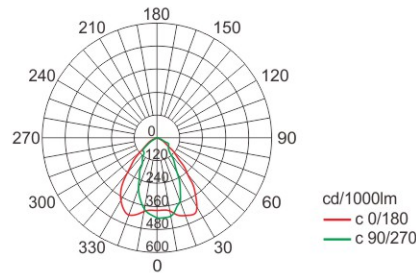

#### 产品规格 Product Specifications

型号规格 Model specifications	灯具功率 Lamp power	灯座规格 Lampholder specification	壳体类型 Enclosure type	重量 Weight
FAT-L-□□A	N70W、N110(100)W	E27	I	5.0kg
	L70W、L100W、L150W			
	N150W、N250W、N400W	E40	II	11.4kg
	L250W、L400W			
	N1000W	E40	III	30kg(含镇流器) 30kg(Including ballast)
	L1000W			

#### 产品描述 Product Description

执行标准 Conformity to standards	中国GB标准 Chinese GB standards	欧盟EN标准 European EN standards
额定电压 Rated voltage	220V AC 50Hz, 60Hz (可选 Optional)	220V~240V AC 50Hz, 60Hz (可选 Optional)
外壳材质 Enclosure material	铝合金 Aluminum alloy	
透明罩材质 Transparent cover material	钢化玻璃 Tempered glass	
环境温度 Ambient temperature	-40°C ~ +55°C (-60°C ~ +60°C 可选 Optional)	
防护等级 Degree of protection	IP65	
防腐等级 Corrosion-proof level	WF1、WF2(可选 Optional)	C3、C4(可选 Optional)
引入装置 Cable gland	M20×1.5引入规格, 适合Φ8.5mm~Φ14mm电缆 M20×1.5 entry specification, suitable for cable of Φ8.5mm~Φ14mm	



#### 外形尺寸 Outline dimension

