


## Light Fittings for Fluorescent Lamp

### BnY81 Series Explosion-proof Light Fittings for Fluorescent Lamp

#### Photometric data


BnY81-18x1□

Lamp power (W)	Rated luminous flux (Lamp tube)	Luminaire efficiency
18 x 1	1300lm	70%

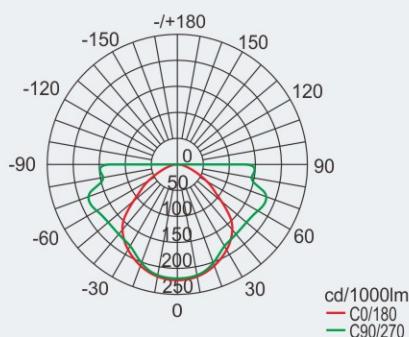


BnY81-18x2□□

Lamp power (W)	Rated luminous flux (Lamp tube)	Luminaire efficiency
18 x 2	2600lm	65%

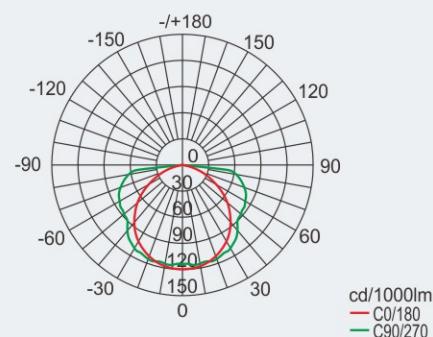


BnY81-36x1□

Lamp power (W)	Rated luminous flux (Lamp tube)	Luminaire efficiency
36 x 1	3250lm	65%

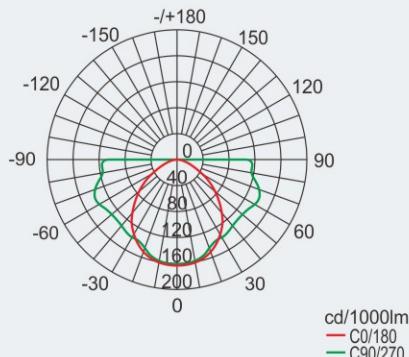

BnY81-36x2□□

Lamp power (W)	Rated luminous flux (Lamp tube)	Luminaire efficiency
36 x 2	6500lm	65%

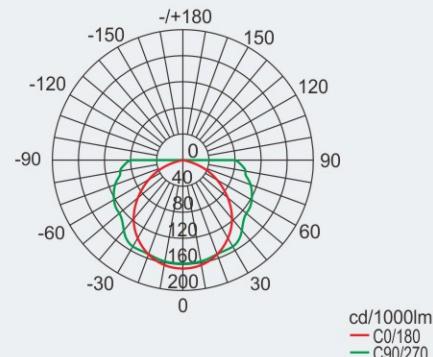

We can provide lighting design and data by professional lighting software DIALUX based upon simulated site situation on request.

## Light Fittings for Fluorescent Lamp


### BnY81 Series Explosion-proof Light Fittings for Fluorescent Lamp

**Photometric data** Note: LED luminous flux is from the standard product of which colour temperature is 5000K

#### BnY81-LED 9x1□

Lamp power (W)	Luminous flux	Wattage
9 x 1	920lm	9W


Rated luminous flux (Lamp tube) 9Wx1: 1080lm

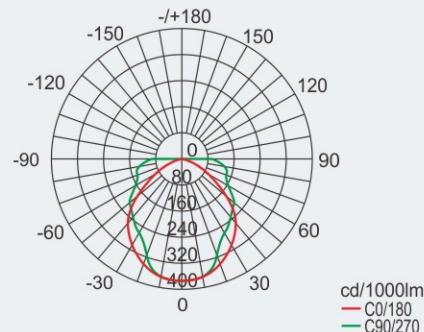

#### BnY81-LED 9x2□

Lamp power (W)	Luminous flux	Wattage
9 x 2	1900lm	18.5W


Rated luminous flux (Lamp tube) 9Wx2: 2160lm

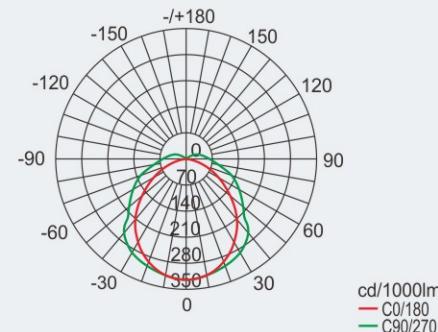

#### BnY81-LED 18x1□

Lamp power (W)	Luminous flux	Wattage
18 x 1	1890lm	18W


Rated luminous flux (Lamp tube) 18Wx1: 2160lm

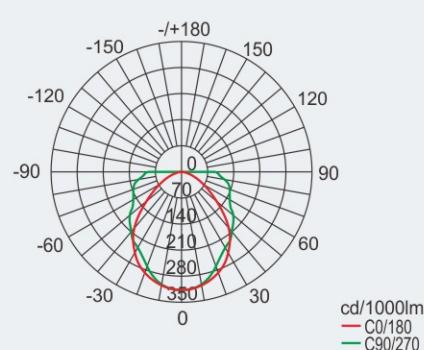

#### BnY81-LED 18x2□

Lamp power (W)	Luminous flux	Wattage
18 x 2	3835lm	36.5W


Rated luminous flux (Lamp tube) 18Wx2: 4320lm

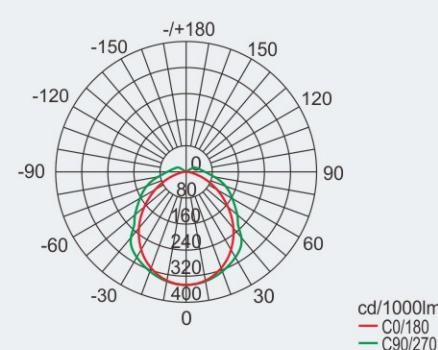

#### BnY81-LED 28x1□

Lamp power (W)	Luminous flux	Wattage
28 x 1	2885lm	28W


Rated luminous flux (Lamp tube) 28Wx1: 3360lm

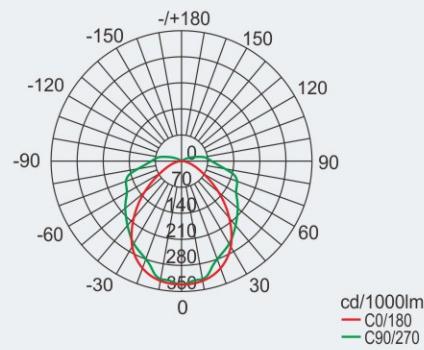

#### BnY81-LED 28x2□

Lamp power (W)	Luminous flux	Wattage
28 x 2	5825lm	56W

Rated luminous flux (Lamp tube) 28Wx2: 6720lm

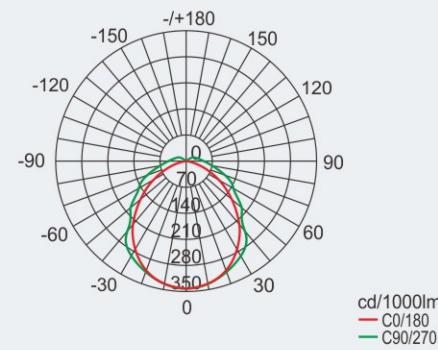

We can provide lighting design and data by professional lighting software DIALUX based upon simulated site situation on request.