

CTG31-LED LED泛光灯


CTG31-LED LED Floodlight



应用场所 Application

- 适用于船舶、海洋平台、港口、码头等作露天场所投光、泛光照明。
- Suitable for spotlight and floodlight illumination in open spaces like ships, offshore platforms, ports and wharfs, etc..

型号含义 Catalogue number logic

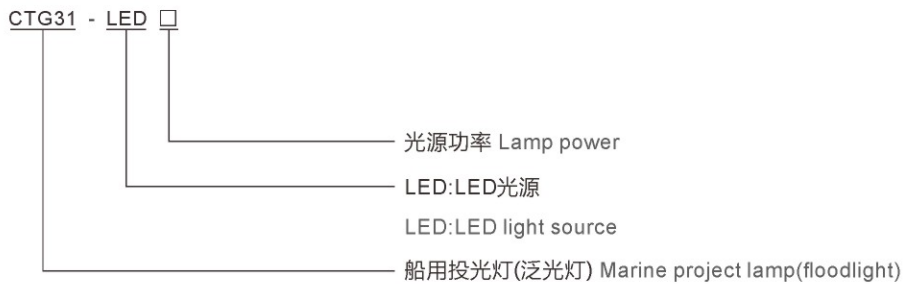

灯体 Housing

- 不锈钢拉伸成型，表面喷塑
- Housing in stretching formed stainless steel, powder coated surface

卡扣/链条 Buckle/chain

- 不锈钢
- Stainless steel

透明罩 Transparent cover

- 钢化玻璃
- Toughened glass

电气 Electric

- 恒流恒压驱动电源
- Constant current constant voltage drive power, wide voltage input

选配表 Selection table

型号 Type	额定电压(V) Rated voltage	额定功率(W) Rated power	光通量(lm) Luminous flux	重量(kg) Weight
CTG31-LED50	220V~240V AC 50/60Hz	50W	6000	8.4
CTG31-LED70		70W	8400	8.4
CTG31-LED100		100W	12600	8.4

D

技术参数 Technical parameters

执行标准 Conformity to standards	GB 11472, GB 7000.7, GB/T 24954, IEC 60598, CCS 入级规范 (CCS standard)
环境温度 Ambient temperature	-40°C~+55°C
光源类型 Light source	LED 模组 LED module
色温 Color temperature	5700K±250K (3000K、4000K可选 Optional)
显色指数 Color rendering index	Ra≥80
防护等级 Degree of protection	IP66
电缆引入口 Cable entris	2×Φ20.5孔，配2×M20×1.5格兰(黄铜镀镍)，适用于Φ5~Φ12mm电缆 2×Φ20.5 hole, with 2×M20×1.5 gland (Nickel plated brass), suitable for Φ5~Φ12mm cable
接线端子 Terminal	3×1.5~4mm ²


CTG31-LED LED泛光灯

CTG31-LED LED Floodlight

配光曲线 Light distribution curve


CTG31-LED50

灯具功率 Lamp power	光通量 Luminous flux
50W	6000lm

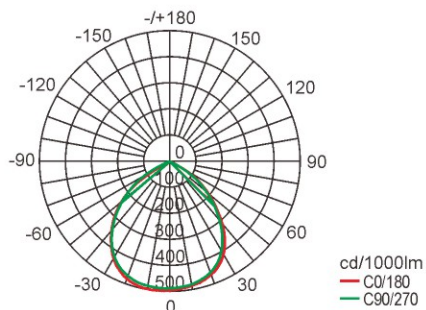


CTG31-LED70

灯具功率 Lamp power	光通量 Luminous flux
70W	8400lm

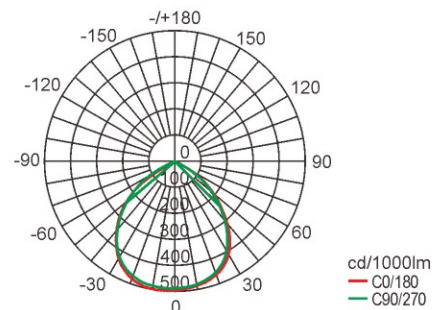

CTG31-LED100

灯具功率 Lamp power	光通量 Luminous flux
100W	12600lm

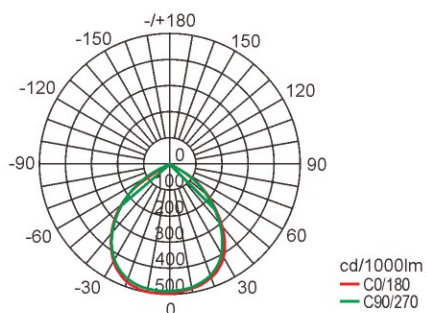

外形尺寸 Outline dimension

