

CBL1 标志灯

CBL1
Emergency Exit Light




应用场所 Application

- 适用于船舶一般舱室或内走道，如船员居住舱、餐厅、驾驶室、报务室等。
- Suitable for general cabin, inner walkway of ships, such as crew living cabin, dining room, cabs and radio rooms, etc..

B

型号含义 Catalogue number logic

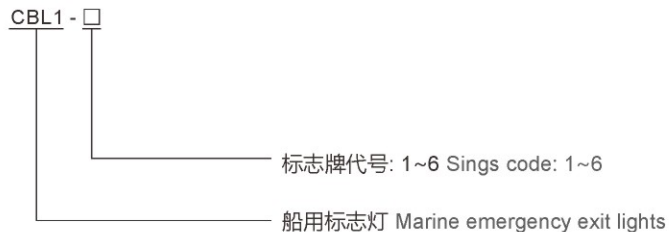

标志牌代号 1~6 型 Signs Code: 1~6



- 请根据指示牌代号进行选型，例如需要，4型指示牌，则型号为：CBL1-4
- Please follow indication board code for selection, for example, if type 4 indication board is required, then the model is CBL1-4.

CBL1 标志灯

CBL1 Emergency Exit Light

灯体 Housing

- 优质钢板，表面喷白色塑粉
- High-quality steel plate with white plastic powder sprayed on the surface

电气 Electric

- 内置应急控制装置及电池组
- In-built emergency controller and battery pack

透明罩 Transparent cover

- 透明玻璃
- Transparent glass

技术参数 Technical parameters

执行标准 Conformity to standards	GB 17945, CCS 入级规范 (CCS standard)
额定电压 Rated voltage	220V~240V AC、110V AC, 50/60Hz
环境温度 Ambient temperature	-40°C~+55°C
光源类型 Light source	LED模组 LED module
防护等级 Degree of protection	IP34(IP66可选 Optional)
额定功率 Rated power	3W
应急时间 Emergency time	≥ 120min
灯具重量 Light weight	3.0kg
电缆引入口 Cable entris	2×M25×1.5格兰(塑料)，适用于Φ9~Φ16mm电缆 2×M25×1.5 gland (Plastic), suitable for Φ9~Φ16mm cable
接线端子 Terminal	1.5~4mm ²

外形尺寸 Outline dimension

