

# CCD9-5 LED舱顶灯

CCD9-5  
LED Pendant Light



## 应用场所 Application

- 适用于各类平台、船舶的一般舱室、内走道、外走道或易碰、潮湿场所照明。
- Suitable for illumination in general cabin interior and exterior passage of various platforms and ships or in areas that are easy for friction and with moist.



## 型号含义 Catalogue number logic



## 灯体 Housing

- 优质不锈钢，表面喷白色塑粉
- High-quality stainless steel plate with white plastic powder sprayed on the surface

## 透明罩 Transparent cover

- PC材质
- PC material

## CCD9-5 LED舱顶灯

CCD9-5 LED Pendant Light

### 选配表 Selection table

型号 Type	电压(V) Voltage	功率(W) Power	光源类型 Light source	光通量(lm) Luminous flux	重量(kg) Weight
CCD9-5	220V~240V AC 50/60Hz 24V DC	10W	LED 模组 LED module	750	1.6


### 技术参数 Technical parameters

执行标准 Conformity to standards	IEC 60598 , IEC 60092-306 , CCS 入级规范 (CCS standard)
环境温度 Ambient temperature	-25°C~+55°C
光源类型 Light source	LED 模组 LED module
色温 Color temperature	5000K (3000K、4000K可选 Optional)
防护等级 Degree of protection	IP56
电缆引入口 Cable entris	适用于Φ10~Φ12mm电缆 Suitable for Φ10~Φ12mm cable
接线端子 Terminal	1.5~4mm <sup>2</sup>

### 配光曲线 Light distribution curve

#### ■ CCD9-5 10W

灯具功率 Lamp power	光通量 Luminous flux
10W	750lm

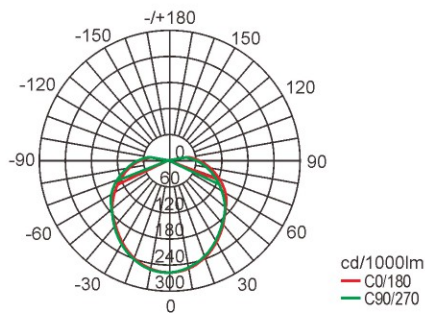

### 外形尺寸 Outline dimension

