

# CCY□7-L LED舱顶灯(A型)


# CCY□7-L LED Pendant Light (Type A)



## 应用场所 Application

- 适用于甲板、车间、机舱、仓库、走道及相应区域。
- Deck, workshop, engine room, stores, passage and other relevant areas.

## 型号含义 Catalogue number logic

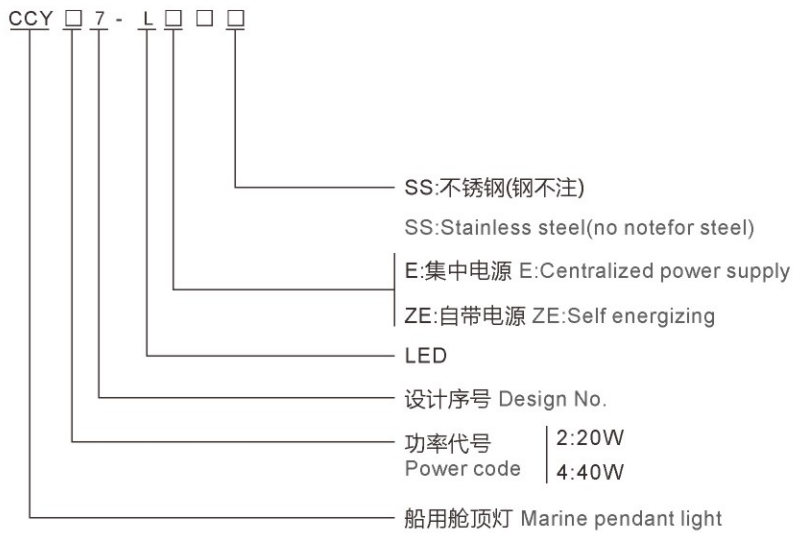

## 灯体 Housing

- 优质钢板，表面喷白色塑粉
- High-quality steel plate with white plastic powder sprayed on the surface

## 透明罩 Transparent cover

- 透明PC
- Transparent PC

## 电气 Electric

- 恒流恒压驱动电源
- Constant current constant voltage drive power

## 安装方式 Mounting

- 使用4个Φ8.5mm可安装孔位固定
- Fix by means 4×Φ8.5mm mounting holes

## 可选配件 Options

- ZE：自带电源应急90分钟
- E：集中电源应急
- LEDT：LED灯管
- SS：不锈钢灯体
- ZE: Self-contained power supply, emergency light operation time 90 minutes
- E: Centralized power supply for emergency
- LEDT: LED tube
- SS: Stainless steel housing

## 选配表 Selection table

型号 Type	额定电压(V) Rated voltage	额定功率(W) Rated power	光通量(lm) Luminous flux	重量(kg) Weight
CCY27-L	220V~240V AC 50/60Hz 110V/120V AC 60Hz	20W	2810	3.1
CCY47-L		40W	5630	4.9

- ZE: 自带电源应急90分钟 Self-contained power supply, emergency light operation time 90 minutes
- E: 集中电源应急(DC24V/3W) Centralized power supply for emergency

## 技术参数 Technical parameters

执行标准 Conformity to standards	IEC 60598 , IEC 60092-306 , CCS 入级规范 (CCS standard)
环境温度 Ambient temperature	-40°C~+55°C
光源类型 Light source	LED 模组 LED module
色温 Color temperature	5000K±250K (3000K、4000K可选 Optional)
显色指数 Color rendering index	Ra≥80
防护等级 Degree of protection	IP66、IP67(可选 Optional)
电缆引入口 Cable entris	4×Φ20.5孔，配2×M20×1.5格兰(塑料)，2×Φ20密封塞，适用于Φ6~Φ12mm电缆 4×Φ20.5 hole, with 2×M20×1.5 gland (Plastic), 2×Φ20 stopping plug, suitable for Φ6~Φ12mm cable
接线端子 Terminal	1.5~4mm <sup>2</sup>


# CCY□7-L LED舱顶灯(A型)

CCY□7-L LED Pendant Light (Type A)

## 配光曲线 Light distribution curve


### ■ CCY27-L LED 20W

灯具功率 Lamp power	光通量 Luminous flux
20W	2810lm

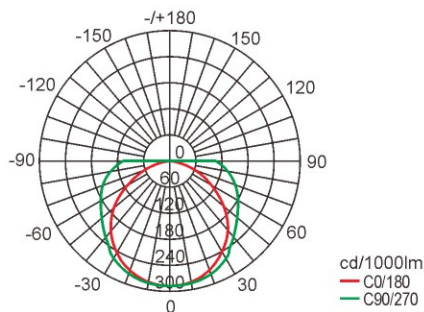


### ■ CCY47-L LED 40W


灯具功率 Lamp power	光通量 Luminous flux
40W	5630lm

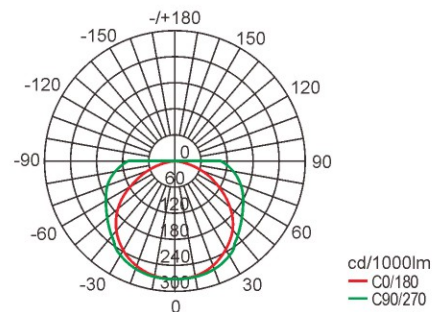

## 外形尺寸 Outline dimension

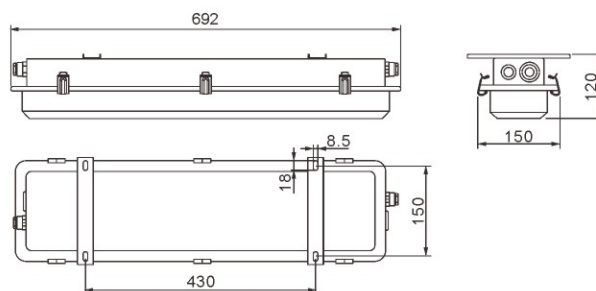

CCY27-L

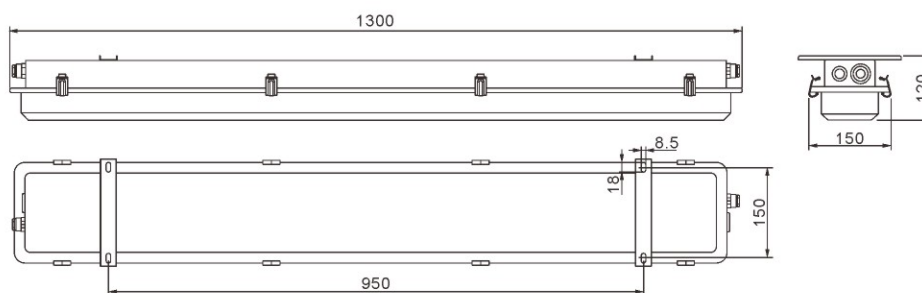

CCY47-L