


应用场景 Application

- 适用于船舶检修或装卸货物等临时性工作场地照明。
- Suitable for the illumination of the temporary work places where the ship overhaul or the loading and unloading of the cargo are performed.



灯体 Housing

- 工程塑料
- Engineering plastic

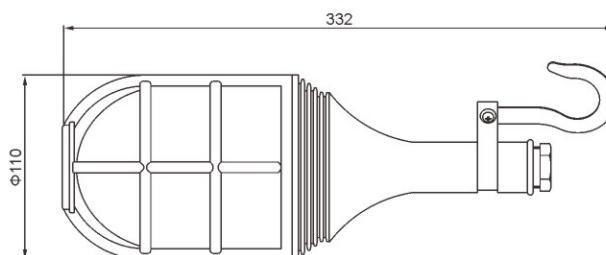

透明罩 Transparent cover

- 钢化玻璃
- Toughened glass

技术参数 Technical parameters

执行标准 Conformity to standards	IEC 60598, CCS 入级规范 (CCS standard)
环境温度 Ambient temperature	-25°C ~ +55°C
光源类型 Light source	LED灯泡 LED lamp
灯座 Lamp holder	E26
防护等级 Degree of protection	IP56
电缆引入口 Cable entrace	适用于Φ8~Φ10mm电缆 Suitable for Φ8~Φ10mm cable

选配表 Selection table

型号 Type	额定电压(V) Rated voltage	额定功率(W) Rated power	光源类型 Light source	重量(kg) Weight
CSD7	220V AC 50/60Hz 24V DC	≤12W	LED灯泡 LED lamp	0.9