

CTY08 床头灯

CTY08 Bedside Light



A型 Type A



B型 Type B

应用场所 Application

- 适用于客舱，休息室，居所及相应区域。
- Suitable for cabin, rest rooms, accommodation and other relevant areas.

型号含义 Catalogue number logic



灯体 Housing

- 铝合金灯头，钢板基座，表面喷塑
- Aluminum alloy lamp holder, steel plate base, surface powder coated

安装方式 Mounting

- 使用2个Φ5mm的安装孔位来固定
- Fix by means of 2×Φ5mm mounting holes

透明罩 Transparent cover

- PC材质
- PC material

电气 Electric

- 恒流恒压驱动电源
- Constant current constant voltage driving power

选配表 Selection table

型号 Type	额定电压(V) Rated voltage	光源类型 Light source	额定功率(W) Rated power	光通量(lm) Luminous flux	重量(kg) Weight	壳体类型 Enclosure type
CTY08	220V~240V AC 50/60Hz 110V/120V AC 60Hz	LED 模组 LED module	5W	1000	0.36	A型 Type A
			5W	710	0.31	B型 Type B


技术参数 Technical parameters

执行标准 Conformity to standards	IEC 60598 , IEC 60092-306 , CCS 入级规范 (CCS standard)	
壳体类型 Enclosure type	A型 Type A	B型 Type B
环境温度 Ambient temperature	-25°C~+55°C	
光源类型 Light source	LED 模组 LED module	
色温 Color temperature	4000K±250K (3000K、5000K可选 Optional)	3000K
显色指数 Color rendering index	Ra≥80	Ra > 90
接线端子 Terminal	1.5~4mm ²	

配光曲线 Light distribution curve


CTY08-5A

灯具功率 Lamp power	光通量 Luminous flux
5W	1000lm

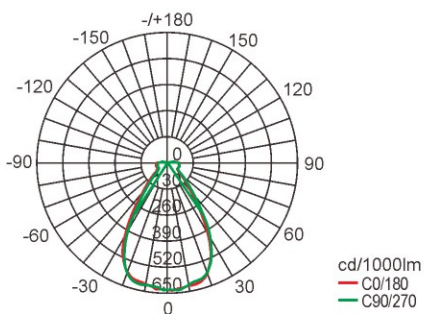


CTY08-5B


灯具功率 Lamp power	光通量 Luminous flux
5W	710lm

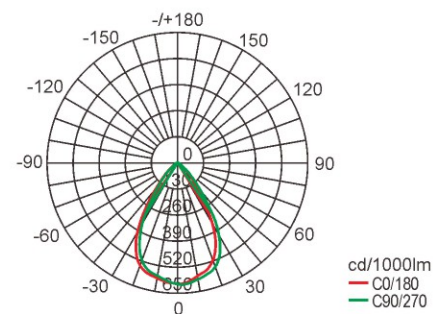

外形尺寸 Outline dimension



A型 Type A

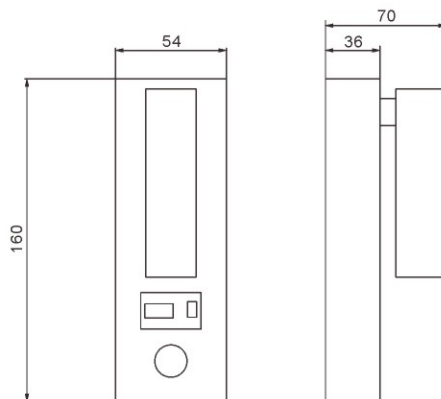

B型 Type B

A