

应用场所 Application


- 适用于150t以上船舶之间白昼信号联络用，由信号灯、充电箱、电池箱组成；
- 工作时通过闪光装置手柄上的电键，发送灯光信号；
- 白昼信号灯插座需另行定货。
- Suitable for daylight signal contact between ships more than 150t; it consists of signal light, charger box and battery box;
- Deliver light signal by the telegraph key on the handle of flash device;
- Sockets of daylight signal light should be ordered separately.



技术参数 Technical parameters

CXD8 白昼信号灯 Daylight Signal Light	
规格 Spec.	24V/60W
光源 Light source	卤钨灯 Tungsten halogen lamp
灯座 Lamp holder	G6.35
防护等级 Degree of protection	IP44
可见距离 Visibility	>2n.m
光强 Intensity	60000cd
光柱角 Beam angle	6°
重量 Weight	7.5kg
材质 Material	铝 Aluminium

外形尺寸 Outline dimension

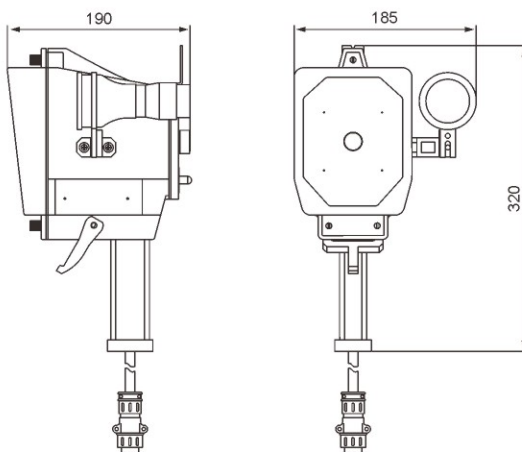


信号灯 Signal light


技术参数 Technical parameters

CXD8-CDX 充电箱 Charger box	
输入 Input	AC110V / 60Hz AC220V 50Hz / 60Hz
输出 Output	AC24V、DC24V
容量 Capacity	7Ah
环境温度 Ambient temperature	-25℃~+ 45℃
插座 Socket	P20-四芯 4 pins
防护等级 Protection class	IP56
重量 Weight	9.6kg


外形尺寸 Outline dimension

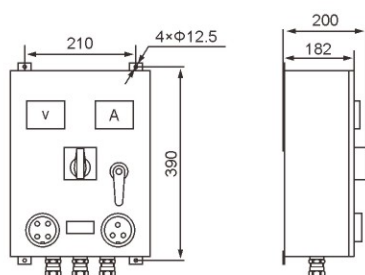


CXD8-CDX
充电箱 Charger Box

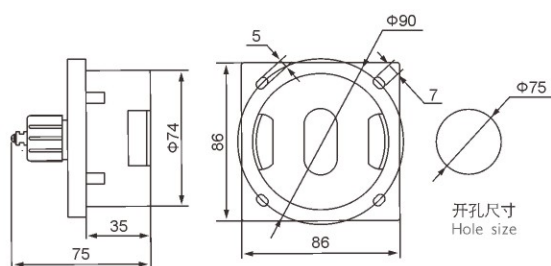

CXZ8-1
插座(室内) Socket (indoor)

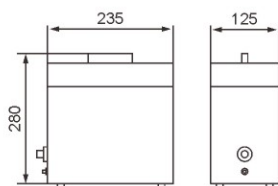

电池箱 Battery Box

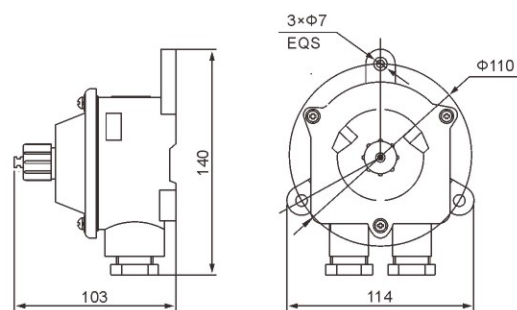

CXZ8
插座(室外) Socket (outdoor)