

LED Light Fittings


HRD95 Series Explosion-proof LED Lightings

Photometric data Note: LED luminous flux is from the standard product of which colour temperature is 5700K (cool white).

HRD95-90-□□

Lamp power (W)	Luminous flux	Wattage
60	7200lm	61W
90	10450lm	90W


(Standard products without lens)

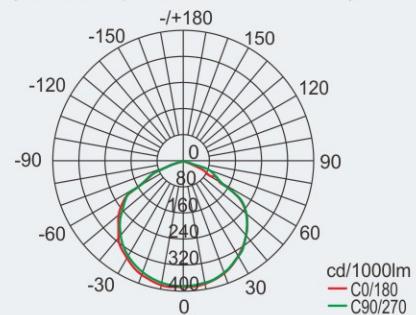

HRD95-90-□□

Lamp power (W)	Luminous flux	Wattage
60	7200lm	61W
90	10450lm	90W

(With 60° lens)

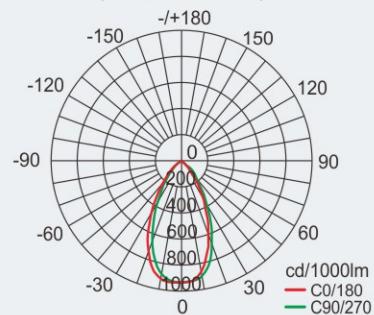


Note: Lens of 40° and 25° can be provided on request.

HRD95-160-□□

Lamp power (W)	Luminous flux	Wattage
120	13200lm	120W
160	19250lm	160W


(Standard products without lens)

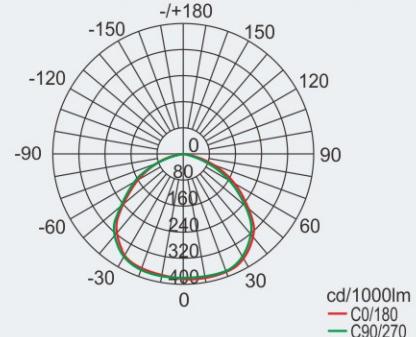

HRD95-160-□□

Lamp power (W)	Luminous flux	Wattage
120	13200lm	120W
160	19250lm	160W

(With 60° lens)

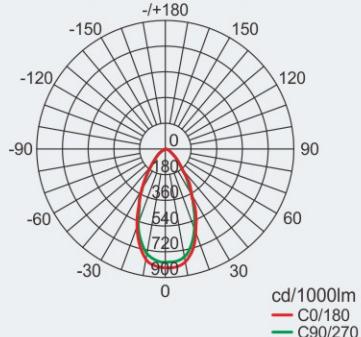


Note: Lens of 40° and 25° can be provided on request.

HRD95-240-□□

Lamp power (W)	Luminous flux	Wattage
200	25000lm	205W
240	28200lm	245W

(Standard products without lens)

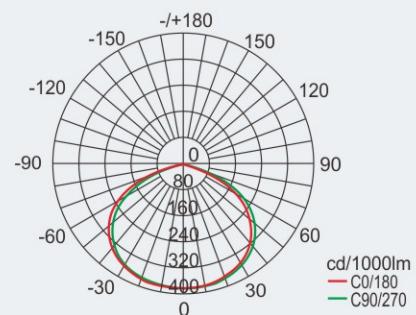

We can provide lighting design and data by professional lighting software DIALUX based upon simulated site situation on request.