

Waterproof

Dustproof

Corrosionproof

型号规格含义 Nomenclature



代号 Code	外形 Outline	名称 Name	代号 Code	外形 Outline	名称 Name
A	○	一通平 One Entry in horizon	F	◎	一通吊 One Entry hang type
B	○-○	直二通平 Two Direct entries in horizon	G	◎-◎	直二通吊 Two Direct entries hang type
C	○-○-○	三通平 Three Entries in horizon	H	◎-◎-◎	三通吊 Three Entries hang type
D	◎-◎	四通平 Four Entries in horizon	I	◎-◎-◎-◎	四通吊 Four Entries hang type
E	○-◎	直角二通平 Two Perpendicular entries in horizon	J	◎-◎	直角二通吊 Two Perpendicular entries hang type
L	□	塑料接线盒4P Plastic junction box 4P	K	◎-◎	吊灯盒 Pendant lamp box
M	□	塑料接线盒6P Plastic junction box 6P			

注: "○"表示平盖, "◎"表示吊盖; "◎-◎"表示吊灯盒(K), 仅G3/4"规格;

吊盖通头: G1/2"规格产品吊盖通头为G1/2", 其它规格产品吊盖通头为G3/4", 特殊要求请注明;

通头一般为管螺纹G1/2"、G3/4"、G1" 如特殊要求可特制;

K型仅为G3/4", L型、M型仅为M20×1.5。

Note: "○" stands for horizontal cover, "◎" for hang cover stands for pendant light box, "◎-◎" only G3/4" available.

Hang cover gland, G1/2" for: G1/2" products, G3/4" for other products, any special requirements please indicate.

The glands are usually for pipe thread G1/2", G3/4" and G1", other specification can also be made upon request.

Type K is only G3/4", Type L and type M is only M20×1.5".


产品特点 Product Features

- ◆ 铝合金压铸壳体，表面高压静电喷塑；
- ◆ 主要用于管路配线、配管、接线、分线以及做为灯具安装附件用；
- ◆ 内装接线端子为四节；
- ◆ 螺纹规格可特制，如NPT螺纹等；
- ◆ 钢管布线(电缆布线请注明)。
- ◆ Die-casting aluminum alloy enclosure, high-voltage electrostatic powder coated surface.
- ◆ Widely used for wire allocation of pipes, pipe distribution, wiring and wire distribution.
- ◆ Built in 4 pieces of terminals.
- ◆ The thread can be specially made upon request, such as NPT thread.
- ◆ Steel pipe wiring is provided (please specify if cable wiring is needed).

产品描述 Product Description

额定电压 Rated voltage	380V
额定电流 Rated current	20A
防护等级 Degree of protection	IP66
防腐等级 Corrosion-proof	WF1, WF2(可选 Optional)
螺纹规格 Thread specification	G1/2", G3/4", G1", M20×1.5(仅L、M Only L, M)
接线端子数量 Number of terminals	4

外形及安装尺寸举例 Example of Outline Dimension and Mounting Type

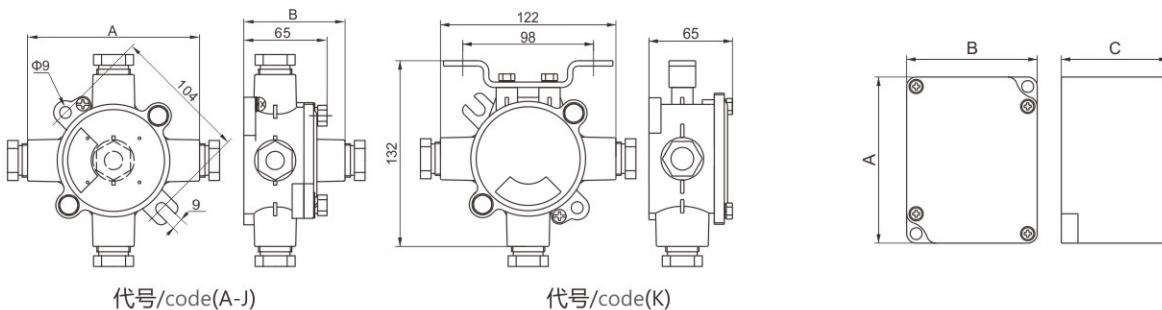

电缆外径(Φ,mm) Cable outer diameter	管螺纹(G") Pipe thread	A	B
6~10	1/2	166	108
8~14	3/4	168	108
12~17	1	170	108

规格 Specifications	电缆外径(Φ,mm) Cable outer diameter	A	B	C
4P	8.5~14	70	55	45
6P	8.5~14	90	50	45



订货须知 Ordering Information

- ◆ 按照产品型号规格说明逐条选择，
例如：FHD-G3/4"B表示为管螺纹G3/4"直二通平盖防水防尘防腐接线盒；
FHD-G1/2"J表示为管螺纹G1/2"直角二通吊盖防水防尘防腐接线盒。
- ◆ Follow the product nomenclature for selection.
For example: FHD-G3/4"B means weatherproof junction box, pipe thread G3/4"and two direct entries in horizon.
FHD-G1/2"J means weatherproof junction box, pipe thread G1/2" and two perpendicular entries hung type cover