


## FNG 系列防水防尘防腐挠性连接管

### FNG Series Weatherproof Flexible Conduits



I 型/Type I

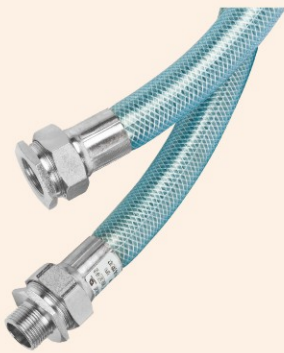

II型/Type II



III型/Type III



IV型/Type IV



Waterproof



Dustproof



Corrosionproof

### 型号规格含义 Nomenclature

F NG - □ □ × □(□) / □(□)

螺纹规格(内或外) Thread specification(Female or Male)

螺纹规格(内或外) Thread specification(Female or Male)

长度 Length

I 型: PVC管 Type I: PVC pipe

II型: 不锈钢软管 Type II: Stainless steel flexible pipe

III型: 包塑波纹管 Type III: Plastic coated bellows

IV型: 不锈钢软管 Type IV: Stainless steel flexible pipe

挠性连接管 Flexible conduit

防水防尘防腐 Weatherproof

### 产品特点 Product Features

- ◆ 螺纹规格可根据要求特制，如NPT、公制螺纹等；
- ◆ II/III型挠性管长度根据用户要求现场自由剪裁，与接头组装后使用；
- ◆ 防腐等级：WF2。
- ◆ Thread specification can be specially made upon request, such as NPT thread, metric thread, etc.
- ◆ The length of type II / III flexible conduit can be specially made upon request, clipping freely and using after the assembly of connector.
- ◆ Corrosion-proof: WF2.

### 订货须知 Ordering Information

- ◆ 按照产品型号规格逐条选择，例如：需要1000mm长一内一外G3/4"螺纹不锈钢防水防尘防腐挠性连接管，则产品选型为FNG-II 1000×G3/4"(内)/ G3/4"(外)。
- ◆ Follow the product nomenclature for selection. For example: if Stainless steel weatherproof flexible conduit, is needed, 1000mm in length, one female & one male G3/4" thread, the type shall be FNG-II 1000×G3/4"(female) / G3/4"(male).

## 选配表 Selection Table

型号 Type	螺纹规格 H Thread specification			管通径(mm) Drift diameter	管内径 D(mm) Inner diameter	长度 L(mm) Length	重量 Weight
	G 螺纹 G Thread	M 螺纹 M Thread	PG 螺纹 PG Thread				
FNG-I	G1/2"	M20×1.5	PG13.5/PG16	15	12	1000	0.50kg
	G3/4"	M25×1.5	PG21	20	17	1000	1.05kg
	G1"	M32×1.5	PG29	25	21	1000	1.35kg
	G1 1/4"	M40×1.5	PG29	32	24	1000	1.95kg
	G1 1/2"	M50×1.5	PG36/PG42	40	30	1000	2.30kg
	G2"	M63×1.5	PG48	50	36	1000	4.40kg
FNG-II FNG-III	G1/2"	-	-	15	15.6	1000	0.30kg
	G3/4"	-	-	20	19.6	1000	0.35kg
	G1"	-	-	25	FNG-II: 24.6 FNG-III: 25.3	1000	0.40kg
	G1 1/4"	-	-	32	31.5	1000	0.52kg
	G1 1/2"	-	-	40	37.5	1000	0.62kg
	G2"	-	-	50	50.0	1000	0.80kg
FNG-IV	G1/2"	M20×1.5	-	14.2	13	1000	0.30kg
	G3/4"	M25×1.5	-	18.6	14.4	1000	0.45kg
	G1"	M32×1.5	-	24.2	19	1000	0.70kg
	G1 1/4"	M40×1.5	-	30	24	1000	0.90kg
	G1 1/2"	M50×1.5	-	37.5	31.5	1000	1.10kg
	G2"	M63×1.5	-	48.5	39	1000	1.50kg

注：其它长度可定制。Other length can be customerized.

## 产品描述 Product Description

产品型号 Product model	防护等级 Degree of protection	护套材质 Material of sheath	接头材质 Material of connectors
FNG-I	IP66	PVC管 PVC pipe	碳钢镀锌 Galvanized carbon steel
FNG-II	IP40	不锈钢 Stainless steel	不锈钢 Stainless steel
FNG-III	IP65	热镀锌钢带，表面PVC包塑 Hot dip galvanized steel strip, coated with PVC plastic	锌合金镀锌 Galvanized zinc alloy
FNG-IV	IP65	不锈钢 Stainless steel	不锈钢 Stainless steel

## 外形及安装尺寸举例 Example of Outline Dimension and Mounting Type

