

HRFT-E LED泛光灯

HRFT-E LED Floodlight



应用场所 Application

- 适用于船舶、海洋平台、港口、码头等作露天场所投光、泛光照明。
- Suitable for spotlight and floodlight illumination in open spaces like ships, offshore platforms, ports and wharfs, etc..

型号含义 Catalogue number logic



灯体 Housing

- 优质海工铝合金，表面喷塑
- High quality maritime aluminum alloy, power coated surface

透明罩 Transparent cover

- PC材质
- PC material

电气 Electric

- 恒流恒压驱动电源
- Constant current constant voltage drive power, wide voltage input

选配表 Selection table

型号 Type	额定电压(V) Rated voltage	额定功率(W) Rated power	光通量(lm) Luminous flux	重量(kg) Weight
HRFT-E 200	220V~240V AC 50/60Hz	200	26000	8.5
HRFT-E 240		240	31200	9.5
HRFT-E 400		400	52000	23.5
HRFT-E 500		500	65000	19.0

D


技术参数 Technical parameters

执行标准 Conformity to standards	GB 11472, GB 7000.7, GB/T 24954, IEC 60598, CCS 入级规范 (CCS standard)
环境温度 Ambient temperature	-40°C~+55°C
光源类型 Light source	LED 模组 LED module
色温 Color temperature	5700K±250K (3000K、4000K可选 Optional)
显色指数 Color rendering index	Ra≥80
防护等级 Degree of protection	IP66
电缆引入口 Cable entris	2×Φ25.5孔，配2×M25×1.5格兰(黄铜镀镍)，适用于Φ9~Φ16mm电缆 2×Φ25.5 hole, with 2×M25×1.5 gland (Nickel plated brass), suitable for Φ9~Φ16mm cable
接线端子 Terminal	3×1.5~4mm ²


HRFT-E LED泛光灯

HRFT-E LED Floodlight


外形尺寸 Outline dimension

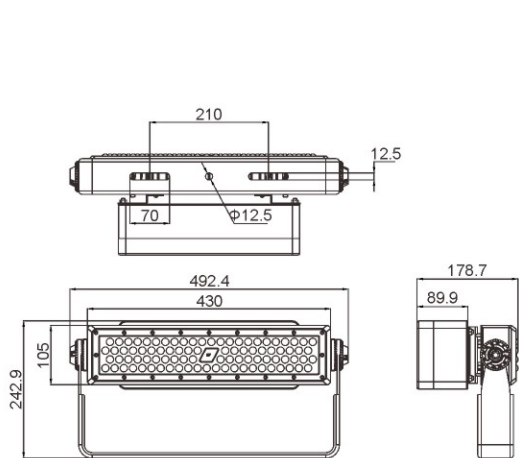


HRFT-E 200

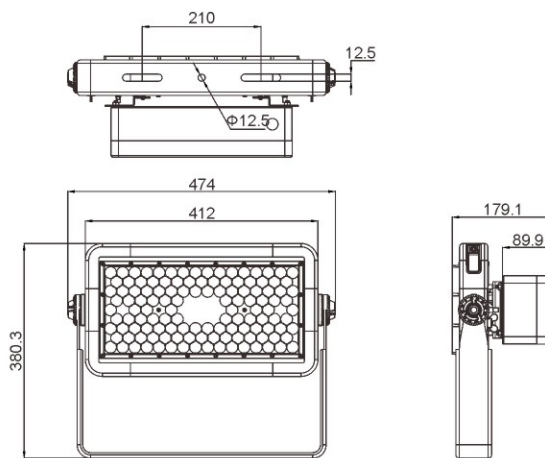

HRFT-E 240

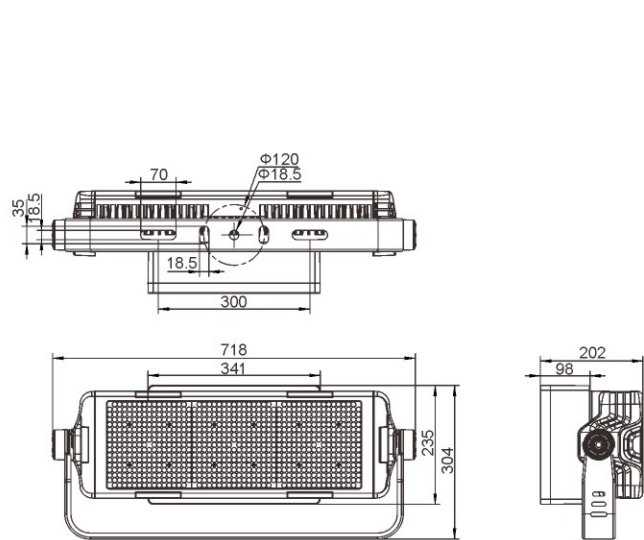

HRFT-E 400

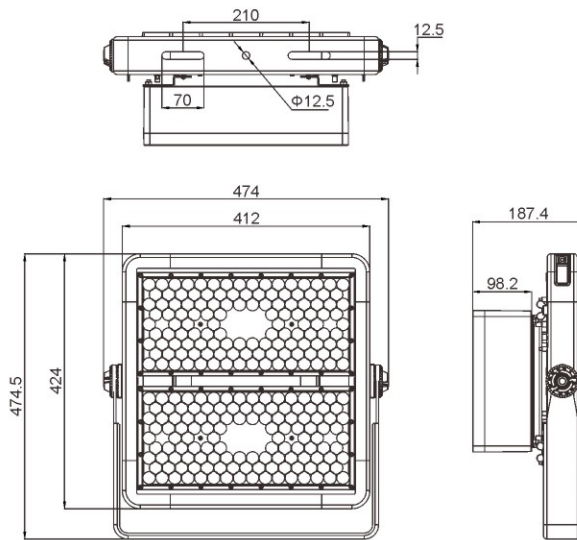

HRFT-E 500