

# JTZ81-300Y LED探照灯

JTZ81-300Y  
LED Search Light



ABS

IP  
66/67



## 应用场所 Application

- 适用于船舶、港口、码头等作露天场所搜索照明。
- Suitable for search illumination in open spaces like ships, ports and wharfs, etc..

## 型号含义 Catalogue number logic



### 灯体 Housing

- 不锈钢，表面喷塑
- 优质海工铝合金，表面喷塑
- Stainless steel, powder coated surface
- High quality maritime aluminum alloy, powder coated surface

### 透明罩 Transparent cover

- 钢化玻璃
- Toughened glass

### 电气 Electric

- 恒流恒压驱动电源，宽电压输入 100V~277V AC 50/60Hz
- Constant current constant voltage driving power, wide voltage input 100V~277V AC 50/60Hz

### 选配表 Selection table

型号 Type	额定电压(V) Rated voltage	额定功率(W) Rated power	中心光强(cd) Central light intensity	发散角 Divergence angle	重量(kg) Weight
JTZ81-300Y	100V~277V AC 50/60Hz	300W	4.5×10 <sup>8</sup>	3.0°	30.0

### 技术参数 Technical parameters

执行标准 Conformity to standards	GB 11472, GB 7000.7, GB/T 24954, IEC 60598, CCS 入级规范 (CCS standard)
环境温度 Ambient temperature	-40°C~+55°C
光源类型 Light source	LED 模组 LED module
色温 Color temperature	5000K
显色指数 Color rendering index	Ra≥70
防护等级 Degree of protection	灯头(Lamp holder) : IP66/IP67 , 云台(Pan-tilt head) : IP66M
电缆引入口 Cable entris	配FQM-I, M20×1.5格兰, 适用于Φ6~Φ12mm电缆 With FQM-I, M20×1.5 gland, suitable for Φ6~Φ12mm cable 电动装置 : 适用于Φ6~Φ12mm电缆 Electric device: Suitable for Φ6~Φ12mm cable
接线端子 Terminal	3×1.5~4mm <sup>2</sup>


# JTZ81-300Y LED探照灯

JTZ81-300Y LED Search Light

## 配光曲线 Light distribution curve

■ JTZ81-300Y

灯具功率 Lamp power	光通量 Luminous flux
300W	14407lm

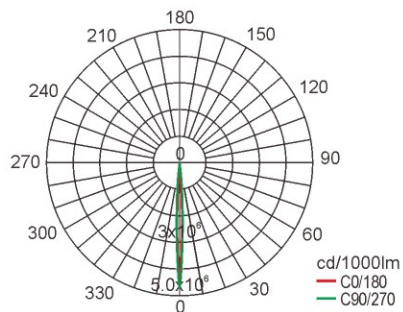

## 外形尺寸 Outline dimension

